

CYCLONE FLEX

25-80 HP (19-60 KW)
540 rpm














Pull type gang grooming mowers


- Heavy duty transport frame.
- Cutting heights: from 1" to 5".
- Pull type mower with high flotation transport tires (20.5"x8"x10").
- Single action hydraulic folding wing system for easy transport & storage.
- Transport width 8'4" max.
- Telescoping wings that allow for adjustable cutting width to increase or decrease mower overlap.
- Constant velocity driveline with slip clutch (1 3/8" ASAE cat. 6).
- Stamped steel reinforced wheel arm attached by 8 bolts for maintaining a consistent cutting height.
- 3 front antiscalping rollers standard.
- Safety chain shield standard.
- 8 gauge reinforced mower decks.
- Remote safety locks for local transport & deck kick out attachments.
- Completely independent free floating mowing decks for a perfect cut on uneven terrain.
- Unique double pivot floating linkage.
- 12 rubber tires with bearings (4 per deck) to guarantee a perfectly level cut.
- Heavy duty, one piece, balanced steel pulleys.
- Two heavy duty reinforced belts per deck (SPBX).
- Single unit gearboxes with cooling fins.
- Spiral gears guarantee strength and quietness.
- Stamped steel wheel yokes.
- Single unit driveline with shear pin safety.

STANDARD



Gearboxes, manufactured by Befco, equipped with spiral gears ensure better power transmission, increase longevity and reduce noise

MODEL	312-FLXH	315-FLXH	317-FLXH	312-FLXA	315-FLXA	317-FLXA
	HARD TIRES			AIR TIRES		
 HP	25-80	30-80	35-80	25-80	30-80	35-80
 ft	12'	15'	17'	12'	15'	17'
 in	91"	97"	100"	91"	97"	100"
 in	74"	92"	103"	74"	92"	103"
 lbs	2,742	2,874	2,995	2,694	2,826	2,947
 N°	9	9	9	9	9	9
 in	1"-5"	1"-5"	1"-5"	1"-5"	1"-5"	1"-5"
 N°	6 SPBX	6 SPBX	6 SPBX	6 SPBX	6 SPBX	6 SPBX
 N°-in	12-10"x3.2"	12-10"x3.2"	12-10"x3.2"	12-11"x4"	12-11"x4"	12-11"x4"
 N°/ft	2-4' mowers & 1-5' mower	2-5' mowers & 1-6' mower	3-6' mowers	2-4' mowers & 1-5' mower	2-5' mowers & 1-6' mower	3-6' mowers
 1 3/8"	ASAE cat. 6 cv, slip clutch	ASAE cat. 6 cv, slip clutch	ASAE cat. 6 cv, slip clutch	ASAE cat. 6 cv, slip clutch	ASAE cat. 6 cv, slip clutch	ASAE cat. 6 cv, slip clutch

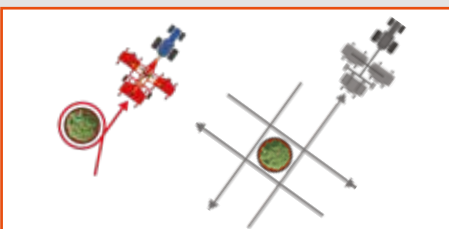

The frame design along with our CV driveline allows Flex mowers to circle trees and obstacles in one pass where competitors require multiple passes.



Hexagonal yokes on front tires of rear mower deck to prevent slippage on slopes



Standard front antiscaling roller

OPTIONALS CYCLONE C50

- Mulching kit



009-9184 C50-RD5

009-9185 C50-RD6

009-9186 C50-RD7

009-9915



- Front antiscalping roller
(standard on C50-RD7 model)

002-800

- Quick hitch adapter



FRTXXC50



- Front mount C50
(factory installed)

OPTIONALS CYCLONE C70

002-800

- Quick hitch adapter



FRTXXC70



- Front mount C70
(factory installed)

OPTIONALS CYCLONE FLEX

009-9817

- Hydraulic unlocking system



- Mulching kit



009-9556 312-FLX

009-9557 315-FLX

009-9558 317-FLX

009-9597

- Floating hitch, additional



009-9599

- Roadway kit

