




HRC-08V

FINGER WHEEL "V" RAKES

16-80 HP (12-60 KW)

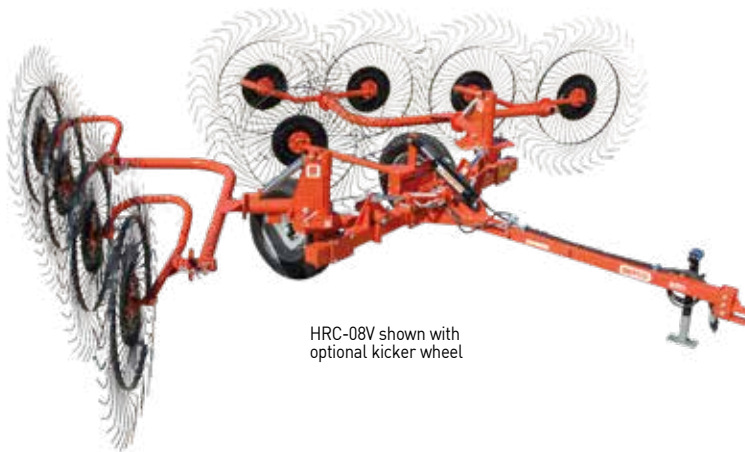


HRC-08V shown with optional kicker wheel

HRC-08V	HRC-10V	HRC-12V
30-80	30-80	30-80
8	10	12
56"	56"	56"
40	40	40
3/32"	3/32"	3/32"
21'4"	23'4"	25'7"
8'	8'	8'
8'10"	10'	12'1"
14	14	14
1,290	1,457	1,623

- Working speed of up to 14 mph, low costs of maintenance, and ease of use make these units indispensable for raking hay.
- Floating rake wheels with spring steel tines follow ground contour evenly.
- Multiple adjustment capabilities allow operator to adjust raking width, windrow width and raking angle.
- Pull type 8, 10 and 12 wheel rakes with double action hydraulic cylinders for easy transportation and storage.
- Hydraulic ball valves allow for single side operation and lock rakes during transport and storage.
- Narrow 8' transport width allows rakes to be easily transported to different work locations.
- 8 and 12 wheel rakes may be adjusted to spread or turn crop.
- Optional center kicker wheel with additional hydraulic cylinder.

STANDARD



"V" rakes can be used for raking, turning and spreading



Two hydraulic cylinders with ball valves



Narrow 8" transport width



Springs adjust the pressure of the wheels to the ground

OPTIONALS FINGER WHEEL "V" RAKES

009-9982

- Kicker wheel for HRC models (includes hydraulic cylinder)



OPTIONALS TEDDERS

009-9966

- Hydraulic lift kit for model DRP-480



USE ONLY BEFCO ORIGINAL SPARE PARTS

FOR YOUR REFERENCE:

Dealer Account number

Rep name

Rep telephone

Sales telephone

(800) 334-6617

Sales fax

(252) 977-9718

Sales e-mail

sales@befco.com

Parts telephone

(877) 663-3458

Parts fax

(800) 265-6962

Parts e-mail

parts@befco.com