


LANDSCAPE RAKE


16-65 HP (12-48 KW)
cat. 1



- 5 forward & 5 reverse positions on standard duty series.
- 3 forward and 3 reverse on subcompact series.
- Sturdy frame construction.
- 2" center tine spacing.
- 2 hole tine $\frac{5}{16}$ " x 1" on standard duty series.
- 1 hole tine $\frac{5}{16}$ " x 1" on subcompact series.
- 3 point linkage, cat. 1.

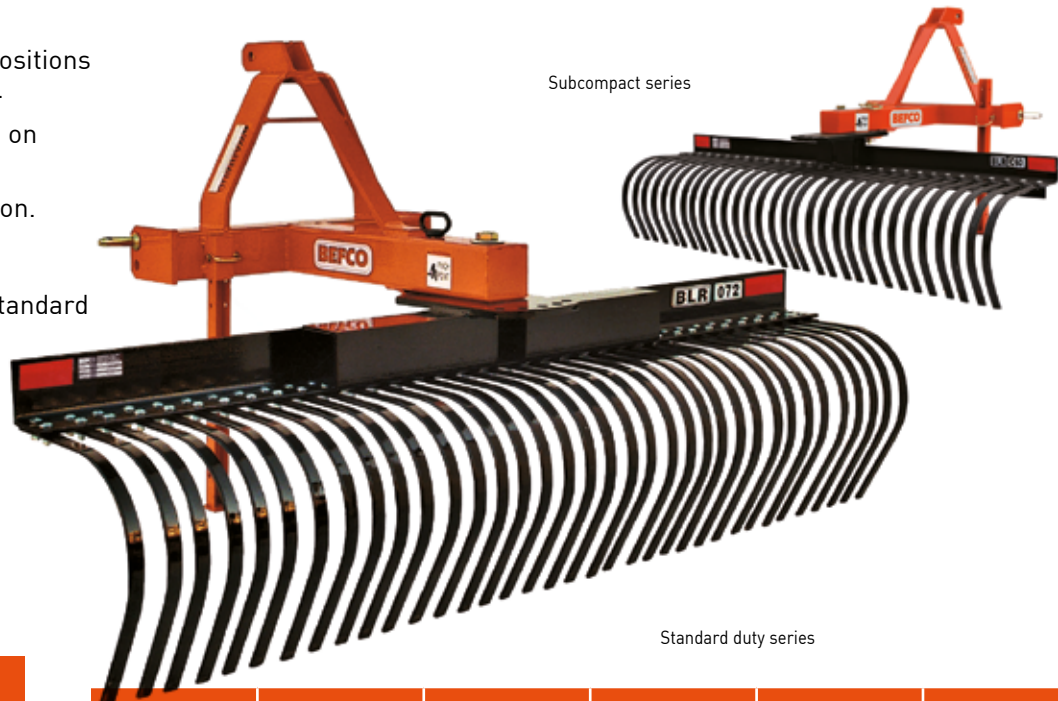

STANDARD



Front or rear tractor mounting



Up to 32° angling on standard duty rakes

MODEL		BLR-C48	BLR-C60	BLR-072	BLR-084	BLR-096
		SUBCOMPACT SERIES		STANDARD DUTY SERIES		
	HP	16-30	16-30	25-65	25-65	25-65
	in	48"	60"	72"	84"	96"
	lbs	135	156	248	274	314
	lbs	180	198	293	319	359
		16°	16°	16° & 32°	16° & 32°	16° & 32°
	N°	24	30	36	42	48

All subcompact and standard duty rakes are crated 2 each of the same model. Add \$50 net for single order units.

OPTIONALS SOIL PULVERIZERS HD



- 2nd rear roller assembly Ø 5 7/16"

009-9646 BPL-272

009-9647 BPL-284

OPTIONALS REAR BLADE SD

BRB-001

- Skid shoes



OPTIONALS REAR BLADE HD

BRB-001

- Skid shoes



BRB-002

- Hydraulic offset control



OPTIONALS LANDSCAPE RAKE BLR

009-9159

- Gauge wheels (standard duty series)



BLR-002

- Gauge wheels (subcompact series)

