

REAR BLADE SD

16-50 HP (12-37 KW)
cat. 1




Standard duty rear blades

- 5 forward & 5 reverse positions on standard duty series.
- 3 forward and 3 reverse positions on subcompact series.
- Sturdy frame construction.
- Left or right offset.
- 3 tilt positions on standard duty series.
- 1/2" x 6" heat treated reversible cutting blade.
- 1/4" moldboard thickness.
- 3 point linkage, cat. 1.

| MODEL | | BRB-C48 | BRB-C60 | BRB-072 | BRB-084 |
|-------|-----|-------------------|-----------|----------------------|-----------|
| | | SUBCOMPACT SERIES | | STANDARD DUTY SERIES | |
| | HP | 16-30 | 16-30 | 25-50 | 25-50 |
| | in | 48" | 60" | 72" | 84" |
| | lbs | 139 | 158 | 275 | 294 |
| | lbs | 189 | 208 | 325 | 344 |
| | | - | - | 14° | 14° |
| | | 16° | 16° | 16° & 32° | 16° & 32° |
| | in | 6" | 6" or 12" | 6" or 12" | 6" or 12" |

Standard duty series.

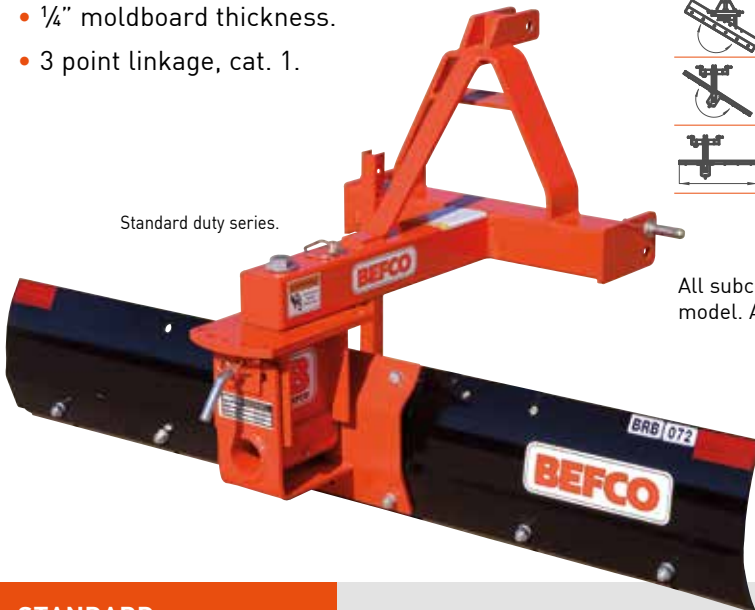

All subcompact and standard duty blades are crated 2 each of the same model. Add \$50 net for single order units.


Subcompact series.




STANDARD




Front or rear tractor mounting



Up to 32° angling on standard duty blades

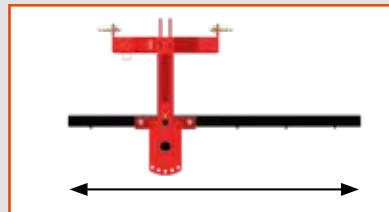

Up to 12" offset



Up to 14° tilt on standard duty blades

OPTIONALS

SOIL PULVERIZERS HD



• 2nd rear roller assembly \varnothing 5 $\frac{5}{16}$ "

009-9646 BPL-272

009-9647 BPL-284

OPTIONALS

REAR BLADE SD

BRB-001

• Skid shoes



OPTIONALS

REAR BLADE HD

BRB-001

• Skid shoes



BRB-002

• Hydraulic offset control



OPTIONALS

LANDSCAPE RAKE BLR

009-9159

• Gauge wheels (standard duty series)



BLR-002

• Gauge wheels (subcompact series)

