

SOIL PULVERIZERS HD


40-90 HP (30-67 KW)
cat. 1



Heavy duty soil pulverizers

- $\frac{3}{8}$ " steel spikes fully welded in a timed scroll pattern on a heavy walled roller with two 160 lbs compression springs.
- Optional 2nd spiked roller available with two 80 lbs compression springs.
- 12" (59.4 lb/ft) frame beam.
- Reversible heat treated $\frac{1}{2}$ " x 2" shanks.
- 3 point linkage, cat. 1.
- 6 $\frac{5}{8}$ " diameter spiked roller tube.
- Self aligning 1" bearings on roller.
- Formed plate "A" frame.

MODEL	BPL-272	BPL-284
HP	40-90	40-90
in	72"	84"
lbs	781	875
lbs	846	940
N°	25	29
N°	106	124
in	2 $\frac{13}{16}$ "	2 $\frac{13}{16}$ "
in	4 $\frac{1}{2}$ "	4 $\frac{1}{2}$ "
lbs	160 lbs per spring	160 lbs per spring

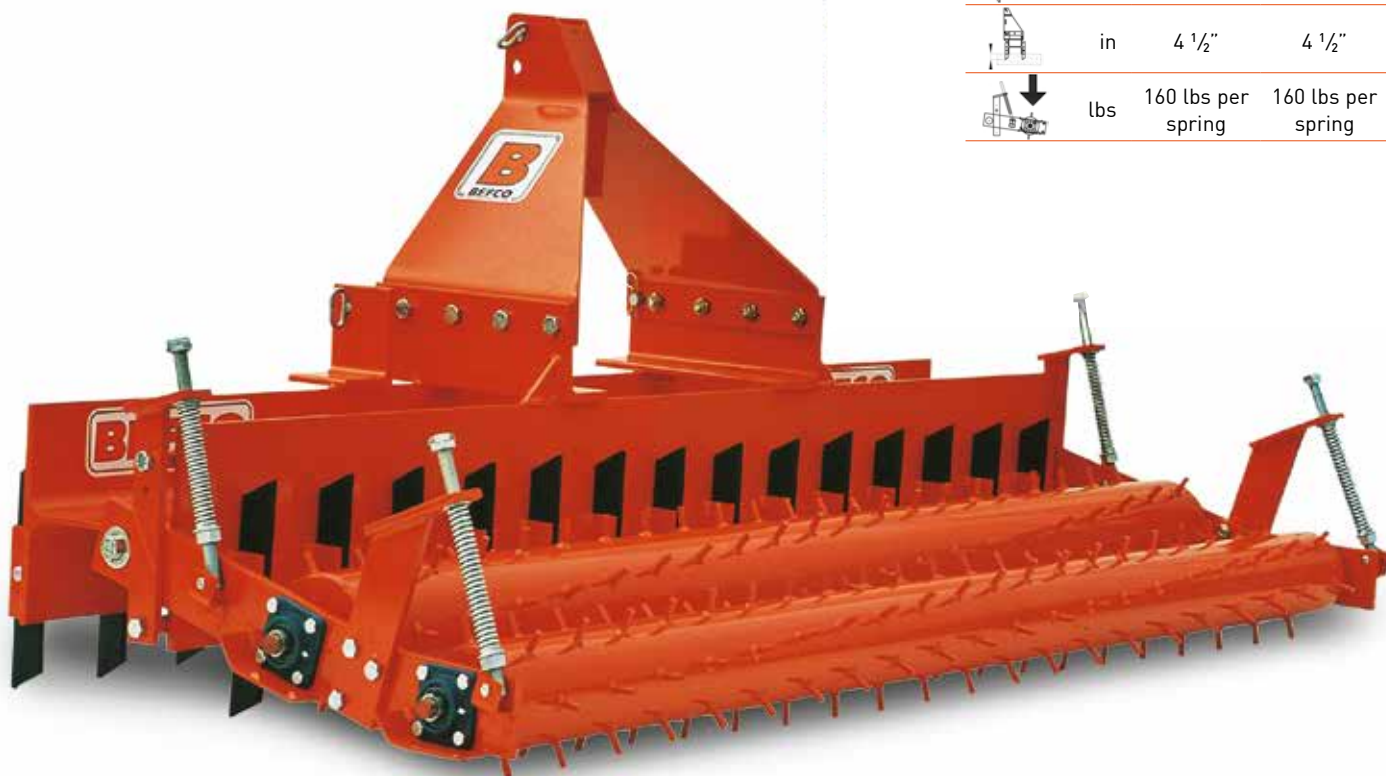

OPTIONALS SOIL PULVERIZERS HD



- 2nd rear roller assembly \varnothing 5 $\frac{5}{16}$ "

009-9646 BPL-272

009-9647 BPL-284

OPTIONALS REAR BLADE SD

BRB-001

- Skid shoes



OPTIONALS REAR BLADE HD

BRB-001

- Skid shoes



BRB-002

- Hydraulic offset control



OPTIONALS LANDSCAPE RAKE BLR

009-9159

- Gauge wheels (standard duty series)



BLR-002

- Gauge wheels (subcompact series)

